


# HDGI-N11DN(P)V2S22

1000TVL WDR IR Mega Analog VP Dome Camera

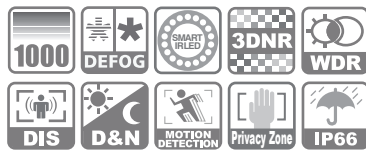

## Key Functions

- Defog
- Smart Digital Zoom
- LSC(Lens Shading Correction)
- HSBLC(Hightlight Suppression BLC)
- Motion Detection
- Privacy Masking
- Coaxial Communication


## Series Model

- HDGI-N15DN(P)V2S22-12VDC/24VAC
- HDG-N11DN(P)V2S22-without IR LED
- HDG-N15DN(P)V2S22-12VDC/24VAC, without IR LED

## Optional Accessory

- HDB243(Wall Mount)
- HVPWB/HVPWB2(Wall Mount)
- HVPCB/HVPCB2(Ceiling Mount)
- HCM150(Corner Mount)
- HCM151(Pole Mount)

## Dimension

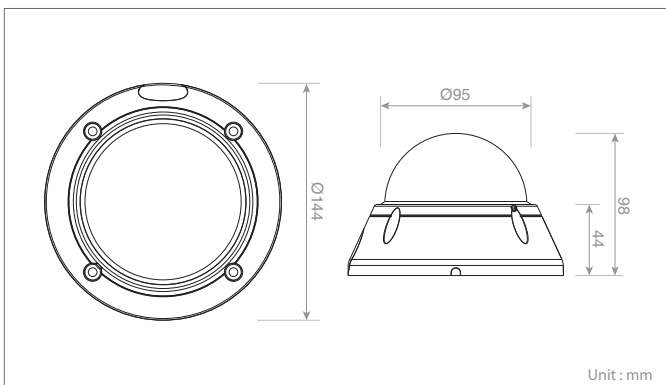

## Key Features

- 1/3" 1.3M Exmor CMOS Sensor
- 1000TVL Horizontal Resolution
- True WDR
- Day & Night(IR Cut Filter)
- 3DNR(Digital Noise Reduction)
- Sens-Up(~x30)
- Smart IR(24 IR LEDs)
- IP66, Vandal Proof

## Technical Specifications

Model	HDGI-N11DNV2S22 / NTSC	HDGI-N11DPV2S22 / PAL	
<b>POWER</b>			
Power Source	DC12V±10%		
Power Consumption	Max. 4.3 Watts(360mA)		
<b>GENERAL</b>			
Imaging Device	1/3" 1.3M Sony CMOS		
Total Pixels	1,312(H)x1,069(V)		
Active Pixels	1,296(H)x1,041(V)		
Scanning System	Progressive		
Sync. System	Internal		
Resolution	1000TVL		
Min. Illumination	1.0Lux(Color), 0Lux(BW, IR LED On)		
Video Output	NTSC/PAL Changed by OSD		
IR	IR LED	24EA IR LED(850nm)	
	Distance	25M	
S/N Ratio	More Than 50dB(AGC Off)		
Camera Control	OSD(Joystick Switch, Coaxial Communication)		
<b>FUNCTION</b>			
Lens	DC		
WDR/BLC	Off/WDR/BLC/HSBLC		
Shutter	Auto, 1/60(1/50), FLK~1/50,000sec		
Brightness	1~100		
AGC	0~15		
Sens-Up	Off/x2~x30		
White Balance	ATW/Push/Indoor/Outdoor/Manual/AWB		
DWDR	On/Off		
Defog	Off/Low/Middle/High		
Day & Night	Auto/Color/B&W		
D & N Auto	D→N Level	0~100	
	N→D Level	0~100	
Special	Delay	1~ 60sec	
	Smart IR Level	1~15	
	LSC(Shading)	On/Off	
	Motion Detection	On/Off(4 Zone)	
	Privacy Masking	On/Off(8 Polygone)	
	3DNR	On/Off(Smart NR)	
	D-Effect	Off/Mirror/V-Flip/Rotate	
	D-Zoom	Off/x1.0~x62	
	Smart D-Zoom	Off/On(x1.0~x62/2 Zone)	
	DIS	On/Off	
Reset	Freeze	On/Off	
	Sharpness	0~15	
	Monitor	LCD/CRT	
	Gamma	Auto/User/User+Y/0.45~1.0	
	Defect Detection	On/Off	
	Video Mode	NTSC(60Hz)/PAL(50Hz)	
	Camera Title	On/Off	
	Language	ENG/JPN/CHN1/CHN2/KOR/GER/FRA/ITA/SPA/POL/RUS/POR/NED/TUR/HEB/ARB	
	Reset	Reset	
	<b>CONNECTOR &amp; ETC</b>		
Power Input	DC Jack		
Video Output	BNC Connector		
Lens Mount	Fixed Mount		
Lens	f=2.8~12mm F1.2~360 Varifocal, ICR(D&N)		
Operating Temperature	14~122°F(-10~50°C)		
Operating Humidity	0 ~ 96%(Non-Condensing)		
Dimension	144(Ø)x98(H)mm		
Weight	530g		
Ingress Protection	IP66		

Specifications are subject to change without notice.