



NDX-6244R

Full HD Built-in IR LED Surface/Flush Mount Dome Network Camera

Key Features

- Full HD(1920x1080) Resolution 25/30fps
- Varifocal 2.8~12mm Lens
- True Day & Night
- D-WDR(ATR-EX)
- 30 IR LEDs for 30m Coverage
- Audio In/Out(1/1), Alarm In/Out(1/1)
- Micro SD Card up to 128GB
- PoE, 12VDC
- IP66

Technical Specifications

Model	NDX-6244R	
IMAGE		
Lens	Varifocal 2.8~12mm, F1.4, DC Iris	
Angle of View	105~37°(H)	
Image Sensor	Type	1/2.9" SONY Exmor CMOS Sensor
	Pixels	1984(H)x1105(V)
Min. Illumination	Color : 0.1Lux / BW : 0Lux@F1.4, 50IRE	
Scanning Mode	Progressive Scan	
Wide Dynamic Range	D-WDR(72dB)	
Day and Night Mode	True D/N(Auto, Day, Night)	
Noise Reduction	3DNR	
Digital Zoom	16X	
Exposure Control	Auto	
White Balance Control	Auto, Incandescent, Fluorescent, Outdoor, Manual	
Back Light Compensation	Yes	
Image Effect	Flip, Mirror, Aisle, Defog, HLC, S-LDC	
Flicker Free Mode	50Hz, 60Hz	
Shutter Speed	Auto(1/10,000~1sec), Manual	
IR Illuminator	Quantity	30 IR LEDs
	Angle	76°(H)
	Distance	Up to 30m
Motorized Lens Control	-	
VIDEO/AUDIO		
Compression	H.264(Baseline, Main, High Profile), MJPEG	
Bitrate Control	CVBR, VBR	
Resolution	1920x1080, 1280x1024, 1280x720/960, 1024x768, 704x480/576, 640x360/480, 320x240	
Frame Rate	Max. 25/30fps	
Streaming	25/30fps(Quad Stream : H.264x3, MJPEGx1)	
Composite Out	-	
Audio Compression	G.711	
Audio Streaming	2 Way	
SYSTEM		
Video Contents Analysis	Tampering, Line Detector, Field Detector	
Motion Detection Area	16 Programmable Area(Include Area 8, Exclude Area 8)	
Privacy Mask Zone	8 Programmable Zone	
FTP Uploading	MJPEG	
Event Notification	E-mail, FTP, Notification Server, XML Notification, AIHM	
Audio Alert	User-Defined 3 Audio Files	
Login Authority	Administrator, Operator, Guest	
Event Buffering	FTP	Pre : 30sec, Post : 30sec
	SD Record	Pre : 10sec, Post : 60sec
Manual Trigger	4 Programmable Trigger	
Security	Multi User Authority, IP Filtering, HTTPS, SSL	
Network Time Sync	NTP Server, Synchronized Computer, Manual	
Software Reset	Restart, Reset, Factory Default	
Hardware Factory Reset	Yes	
Auto Recovery	Backup, Restore	
Remote Upgrade	Web Browsing(IE, Chrome, Safari, Firefox), SmartManager	
SD Recording Mode	Event, Continuous	
NETWORK		
Protocol	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour	
Client Software	Web, SmartManager, Client S/W, Mobile S/W	
Max. User Connection	Live : 10 Users, Playback : 3 Users	
API Support	Open API, Onvif Compliance	
Mobile Support	Android, iOS	
EXTERNAL IN/OUT		
Video Composite Out	-	
Audio	1 Input, 1 Output(Terminal Block)	
Alarm	1 Input, 1 Output(Terminal Block)	
Ethernet	RJ-45(10/100Base-T)	
u-SD Card	SDHC, SDXC(128GB)	
RS485	-	
OSD Remote Control	-	
ETC		
Operating Humidity	0~90%RH(Non-Condensing)	
Operating Temperature	-20~+50 °C	
Power Supply	PoE(IEEE802.3af Compliance, Class0), 12VDC	
Power Consumption	120mA(5.7W)@PoE / 450mA(5.4W)@12VDC	
Dimension	143.4(Ø)x114(H)mm	
Net Weight	Approx. 720g	
Ingress Protection	IP66	

Key Functions

- Auto Exposure, Auto White Balance
- Quad Stream(H.264, MPEG4, MJPEG)
- Onvif Profile S
- Easy Install : Zero Configuration, Discovery, PoE
- Event Boosting, FTP Image Upload, Web Casting, Open VPN, QoS, IP Filtering
- Cross Web Browsing(IE, Safari, Firefox, Chrome)
- Privacy Masking
- AIHM Event
- Event Buffering
- Video Contents Analysis


Software

- SmartManager
- NC-Titanium
- Tive HD
- Titanium Plus VMS

Optional Accessory

- HDB344(Wall Mount)
- HVPWB2(Wall Mount)
- HVPCB2(Ceiling Mount)
- HDA302(Conduit Adapter)

Dimension

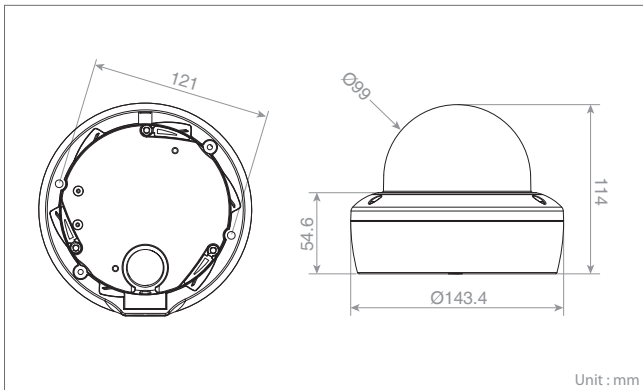

Specifications are subject to change without notice.